

# BRAVO SNORKEL



## VOLKSWAGEN T5 / T6

VARIANT: 2.0 LHD (2003 - On.)

REF: SVW6

FITMENT SIDE: Right

### LINEAR LOW DENSITY POLYETHYLENE RESINE



LL 8446 is a linear low density butene copolymer designed to offer excellent processability, whiteness, and fast grinding rate. This UV stabilized resin is ideally suited for applications that require excellent dimensional control and low warpage.

### PROPERTIES

#### Additive

Long Term UV-8 Stabilizer

#### Density



0.936 g/cm<sup>3</sup> (Based on ISO 1183)

#### Melt Index (190°/2.16 Kg)

5.0 g/10min (Based on ISO 1183)

| PART | DESCRIPTION               | QTY |
|------|---------------------------|-----|
| 1    | Snorkel body              | x1  |
| 2    | Snorkel head 89 mm / 3,5" | x1  |
| 3    | Black clamp               | x1  |
| 4    | Bracket                   | x1  |
| 5    | Screw M4 x 16 mm          | x3  |
| 6    | SEMS bolt M6 x 14 mm      | x2  |
| 7    | Nylon insert              | x3  |
| 8    | Installation template     | x1  |
| 9    | Allen bolt M6 x 30 mm     | x2  |
| 10   | Washer M6 x 20 mm         | x2  |
| 11   | Rivnut M6 x 14 mm         | x2  |
| 12   | Rubber duct connecting    | x1  |

| PART | DESCRIPTION            | QTY |
|------|------------------------|-----|
| 13   | PE duct connecting     | x1  |
| 14   | Clamp 100 - 120 mm     | x6  |
| 15   | Rubber duct connecting | x1  |
| 16   | Metal ring             | x1  |
| 17   | Rubber duct connecting | x1  |
| 18   | Optional ring adapter  | x1  |
| 19   | Allen screw M5 x 6 mm  | x4  |
| 20   | Inner cutting template | x1  |

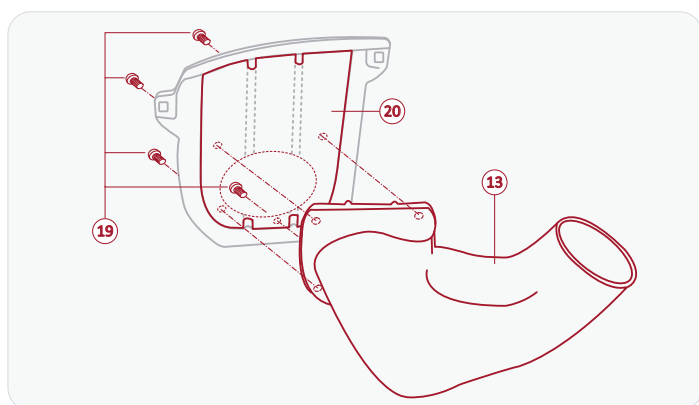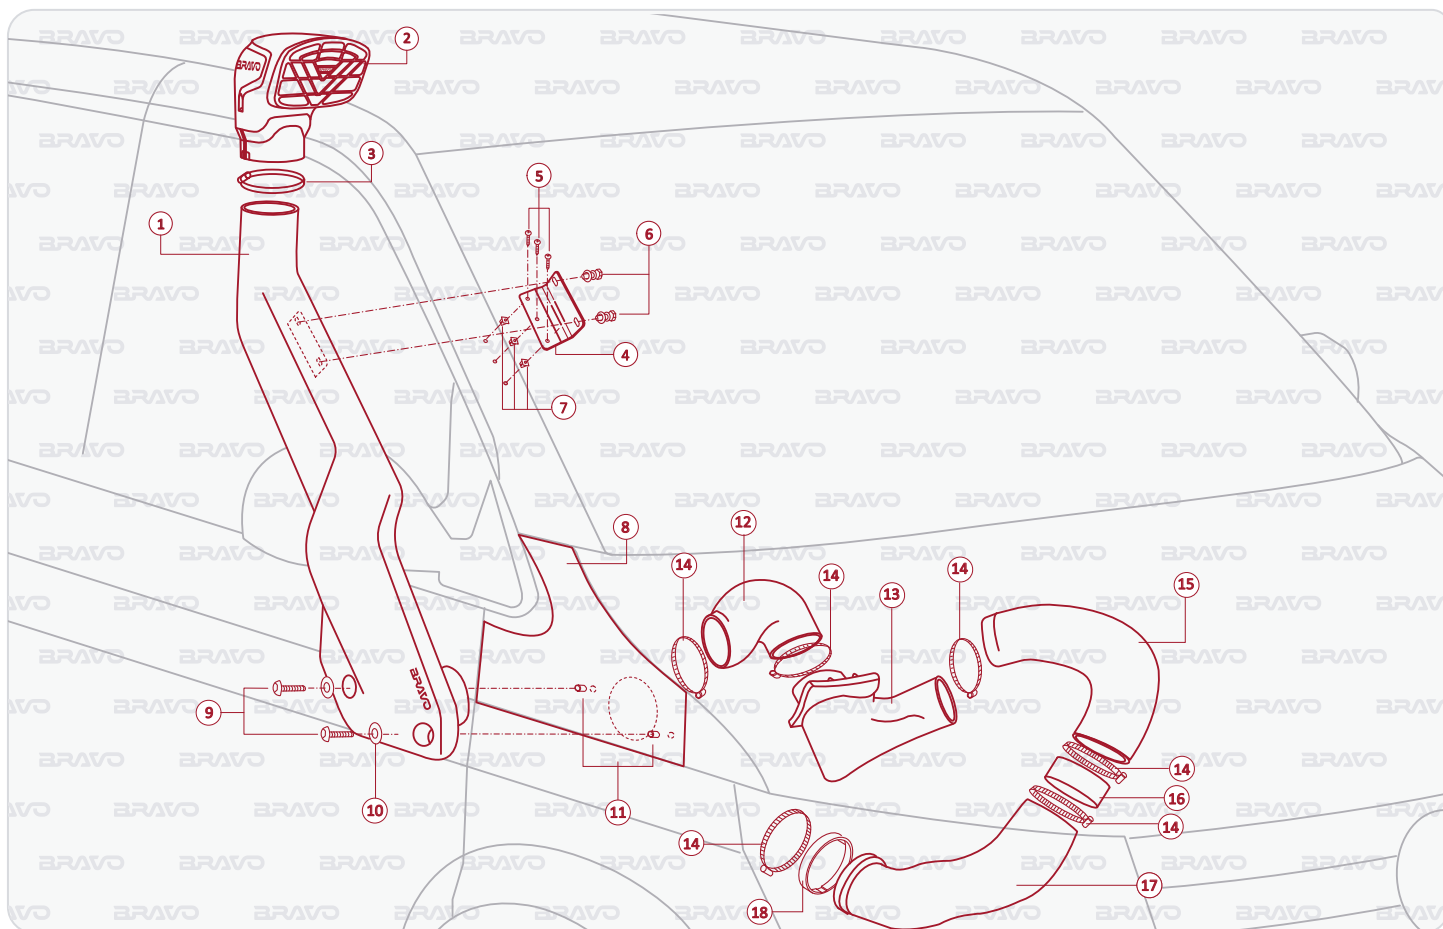

Installation process is under installer's responsibility.